



Console Sinks with Metal Legs Installation Instructions

Parts Included:

- Sink Top
- 2 Long Legs
- 2 Medium Tubes
- 2 Short Tubes
- 1 Cross Tube
- 6 Flanges with Set Screws
- 2 Foot Levelers
- 2 4-Way Tees
- 2 3-Way Tees
- 4 Washers
- 12 Small Screws
- 6 Wall Screws with Plastic Inserts
- 1 Allan Wrench

Tools:

- Screw driver
- Drill
- Level
- White or Clear Silicone


NOTE: Mounting hardware must be adequate for the type of wall. Be sure to re-inforce wall before installation. We recommend a 2"x12" securely fastened to wall studs at the required height for installation.



NOTE: 2 people required for installation. Sink top weighs approximately 70 lbs.

Steps:

1. Set the large basin upside down on a piece of packing cardboard, to prevent scratching. Place each leg into the sockets in the front of the console top. Make sure the legs are firmly set into each socket.
2. One person should hold the console top in place. The other person should use a level on the back and side edges to help position the top, both side to side, and front to back correctly.
3. Use the pencil to mark the mounting hole position for sink and flange positions for metal stand on the wall. Start to drill hole in 2"x12" re-inforced wall for molly bolts or toggle bolts. If drill bit hits a stud, mount bracket and bolts using large wood screws.
4. If molly bolts are used, install and expand the bolt holder and then mount brackets. If toggle bolts are used, make holes large enough to accept collapsible wing nut bolts and then mount bracket. Secure flanges for metal sink stand to wall using 3 metal screws.
5. Before replacing basin, it would be convenient at this point to mount the faucet according to the manufacturer's instructions.
6. Hold basin on wall brackets and ensure that it is level. Do not tighten sink to wall until metal stand has been installed under basin.

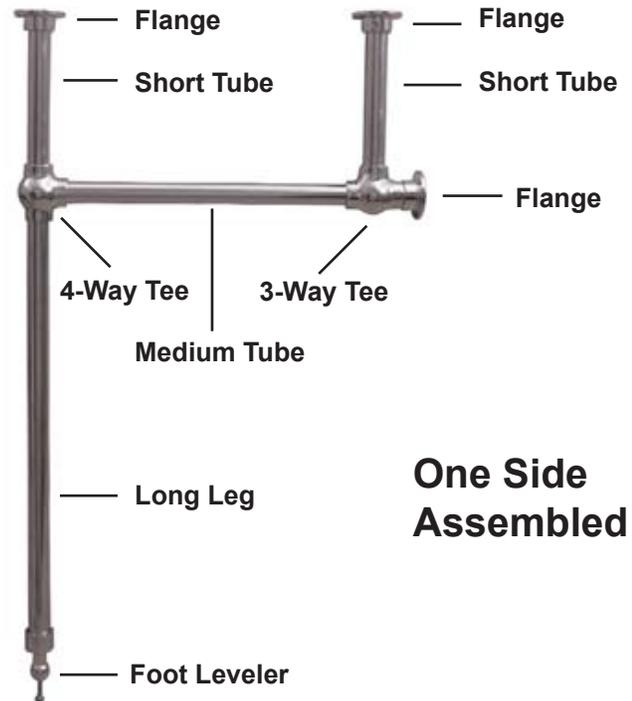

7. Assemble the legs by attaching the horizontal supports to the ball joints. Tighten with the set screws to ensure legs are stable.
8. On the tops of the metal sink stand apply a thin coat of silicone where the basin will rest.
9. Place assembled metal sink stand under sink, sliding top of legs into sockets on the bottom of basin and horizontal supports into flanges on wall.
10. Tighten basin to wall. If vanity has a backplash, add silicone to the edge and facing sides.
11. Connect all supply tubes to the faucet. Connect trap and drain assembly as described by the manufacturer. Legs can be adjusted using set screws at bottom of leg.